



touch screen
2°C ~ 8°C PHARMACY / LAB REFRIGERATOR
mrfv8-650ml



Touch
Screen



MRFV8-650ML

MRFV8-650ML

➔ Real Air Cooling

- The multi-duct vortex refrigeration system and finned evaporator can prevent frosting completely and improve temperature uniformity to a large extent.

🌿 Real Energy Saving

- The refrigerator is equipped with "M+ Energy Core" power management system and complete air cooling design, improving energy saving efficiency by more than 40%.

👁️ Real Visibility

- The electrical heating+ LOW-E design with double considerations can achieve a better anti-condensation effect for the glass door.


🔑 Real Safety

- 6 temperature probes can ensure high precision of temperature control with nearly no fluctuation and thus can improve safety.


✓ Scope of Application

Suitable for storage of biological products, vaccines, drugs, reagents, etc. Suitable for use in pharmacies, pharmaceutical factories, hospitals, centers for disease prevention & control, clinics, etc

🔗 Performance Data / Cooling Curve

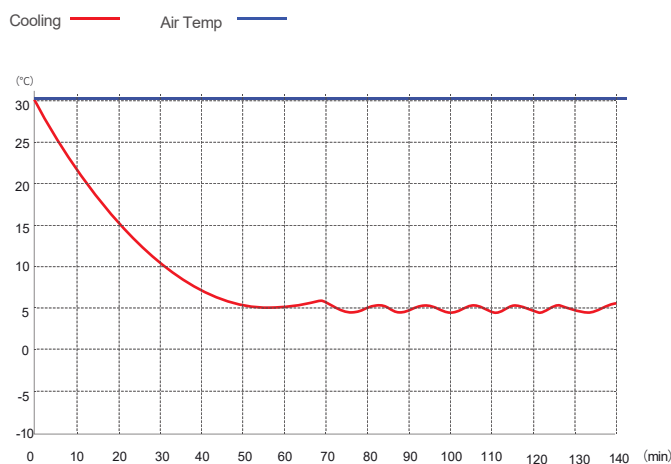

📐 External Dimensions

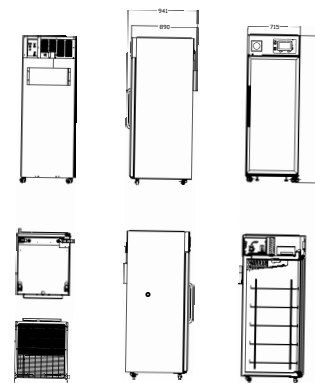



Intelligent Temperature Control

7-inch HD intelligent display touch screen, user-friendly interface and more accurate temperature control, with Bluetooth, Wi-Fi and other functions, more convenient operation and more comprehensive functions;



Security System

The well-developed audible & visual alarm system with multiple audible & visual alarm functions: high temperature alarm, low temperature alarm, sensor failure alarm, door ajar alarm, power failure alarm etc;
The turn-on delay and stopping interval protection function can ensure reliability in running;
The door is equipped with a lock, preventing it from opening accidentally.

Refrigerator programmed to alarm again if alarm event still existed 30mins after Mute-on, this can help avoid any unknown alarm event to happen.



Refrigeration System

Equipped with a compressor supplied by an international famous Secop brand, high-efficiency air-cooled condenser and finned evaporator, ensuring fast refrigeration



Optional chart recorder

This technology provides you with temperature recorders without electronics. No power supply is required. European imported brand, durable and reliable



Data Storage

Equipped with a USB export interface, which can be used for exporting data in PDF
When a U-disk is connected, temperature data can be stored continuously and automatically (data can be stored for more than 10 years);
The printer is optional.



Lighting System

Equipped with lighting system with LED lights, ensuring high visibility inside the cabinet



Human-oriented

Equipped with high-quality shelves made clean from PVC-coated steel wire, which are easy to Aluminum door handle, easy to open, easy to move.

Equipped with testing port, bringing convenience to users in testing temperature inside the cabinet.

Model	MRFV8-650ML
Cabinet Type	Upright
Capacity(L)	650
Internal Size(W*D*H)mm	605*725*1515
External Size(W*D*H)mm	715*941*1985
Package Size(W*D*H)mm	773*947*2153
NW/GW(Kgs)	142/185
Performance	
Temperature Range	2~8+
Ambient Temperature	16-32+
Cooling Performance	5+
Climate Class	N
Controller	Microprocessor
Display	HD intelligent (Touch screen)
Refrigeration	
Compressor	1pc
Cooling Method	Air cooling
Defrost Mode	Automatic
Refrigerant	R290
Insulation Thickness(mm)	55
Construction	
External Material	PCM
Inner Material	Stainless steel/Aluminum plate with spraying(optional)
Shelves	5(coated steel wired shelf)
Door Lock with Key	Yes
Lighting	LED
Access Port	1pc. Ø 25 mm
Casters	4(2 casters with brake)
Data Logging/Interval/ Recording Time	USB/Record every 5 minutes / 10 years
Door with heater	Yes
Alarm	
Temperature	High/Low temperature, High ambient temperature
Electrical	Power failure , Low battery
System	Sensor failure, Door ajar,Communication failure, Condenser overheating
Electrical	
Power Supply(V/HZ)	220-240 ~ 50/60
Rated Power(W)	430
Power Consumption(KWh/24h)	4.73
Rated Current(A)	3.06
Accessory	
Standard	RS485,Remote alarm contact,Backup battery
Options	Chart Recorder